



MASTER MHN-SA

MASTER MHN-SA 2000W/956 400V XW

Compact quartz metal halide lamps with double-pin

Product data

• General Characteristics

Cap-Base	X830R
Cap-Base Information	na [-]
Bulb	TD40 [TD 40mm]
Bulb Finish	Clear
Operating Position	p15 [Parallel +/-15D or Horizontal(HOR)]
Life to 5% failures	1000 hr
Life to 10% failures	1400 hr
Life to 20% failures	2100 hr
Life to 50% failures	3700 hr

• Light Technical Characteristics

Color Code	956 [CCT of 5600K]
Color Rendering Index	85 Ra8
Color Designation (text)	Daylight
Color Temperature	5600 K
Color Temperature Technical	5600 K
Luminous Flux Lamp EM	200000 Lm
Luminous Efficacy Lamp EM	98 Lm/W
Lumen Maintenance 1000h	88 %
Lumen Maintenance 2000h	79 %
Lumen Maintenance 5000h	70 %
Luminance Average EM	7500 cd/cm ²
Chromaticity Coordinate X	330 -

Chromaticity Coordinate Y 362 -

• Electrical Characteristics

Lamp Wattage	2000 W
Lamp Wattage EM 25°C, Nominal	2000.0 W
Lamp Wattage EM 25°C, Rated	2040.0 W
Voltage	400 V
Lamp Voltage	205 V
Lamp Current EM	11.3 A
Dimmable	No

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	225 mg
Energy consumption kWh/1000h	2244 kWh

• UV-related Characteristics

Specific Eff. Radiant Power	60 mW/klm
-----------------------------	-----------

• Luminaire Design Requirements

Pinch Temperature	300 (max) C
Bulb Temperature	980 (max) C

PHILIPS

MASTER MHN-SA

Product Dimensions

Base Face to Base Face A	226 mm
Overall Length C	369 (max) mm
Diameter D	41 (max) mm
Arc Length O	25 mm
Cable Length X	25 mm

Product Data

Order code	928099105129
Full product code	928099105129
Full product name	MASTER MHN-SA 2000W/956 400V XW


Order product name	MASTER MHN-SA 2000W/956 400V XW
Pieces per pack	1
Packing configuration	1
Packs per outerbox	1
Bar code on pack - EAN1	8718291548287
Bar code on outerbox - EAN3	8711500200792
Logistic code(s) - 12NC	928099105129
ILCOS code	MN-2000-E-X830R-/H
Net weight per piece	110.000 gr

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

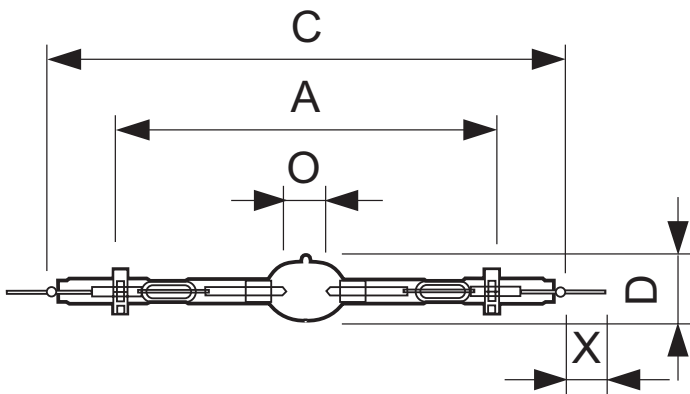


MASTER MHN-SA 2000W/956 400V XW

Product	A (Norm)	C (Max)	D (Max)	O (Norm)	X (Norm)
MHN-SA 2000W/956 400V XW	226	369	41	25	25



X830R

Photometric data

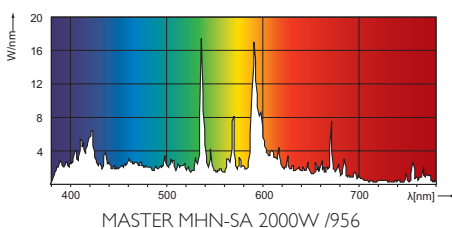



© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, August 29
data subject to change