



# TUV T8

## TUV 55W HO 1SL/6

TUV T8 lamps are double-ended UVC (germicidal) lamps used in professional water and air disinfection units. TUV T8 lamps offer almost constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy. Moreover, they have a long and reliable lifetime, which allows maintenance to be planned for in advance.

### Product data

General Information	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]
Main Application	Disinfection
Useful Life (Nom)	9000 h
System Description	High Output
Light Technical	
Color Code	TUV
Color Designation	- [ Not Specified]
Depreciation at Useful Lifetime	10 %
Operating and Electrical	
Power (Nom)	54 W
Lamp Current (Nom)	0.77 A
Voltage (Nom)	86 V
Approval and Application	
Mercury (Hg) Content (Nom)	2.0 mg


UV	
UV-C Radiation at 100 hr	17.5 W
Product Data	
Full product code	871150061866510
Order product name	TUV 55W HO 1SL/6
EAN/UPC - Product	8711500618665
Order code	928049504003
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	928049504003
Net Weight (Piece)	134.900 g

### Warnings and Safety

# TUV T8



## Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TUV 55W HO 1SL/6	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm

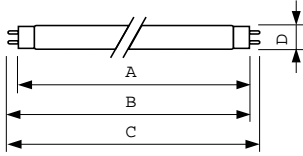

### TUV TL-D 55W HO

## Photometric data

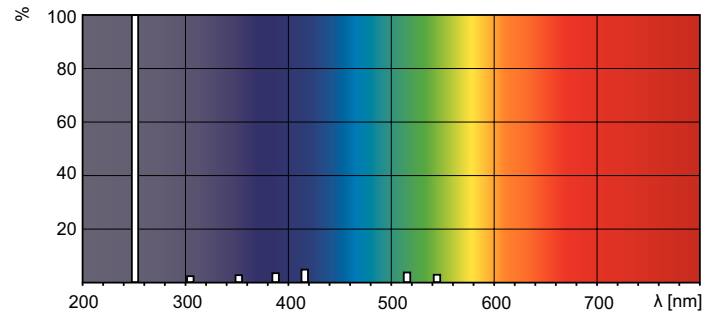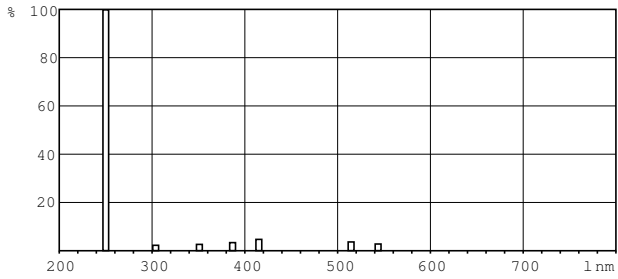

XDPB\_XUTUVTLD-Spectral power distribution B/W

XDPO\_XUTUVTLD-Spectral power distribution Colour

